
PENDANT LED LIGHT

Please read instructions before commencing installation and retain for future reference.

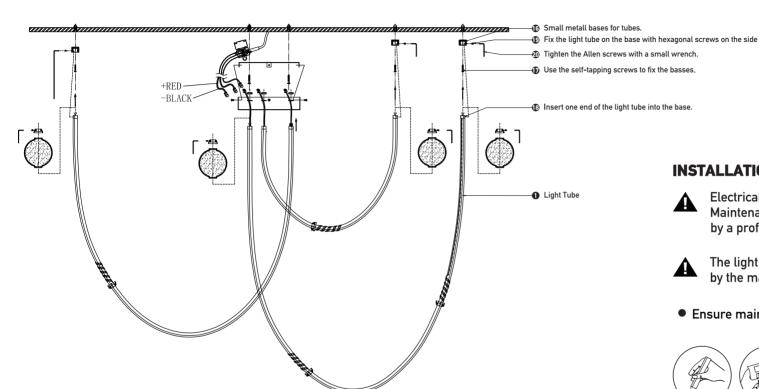

Drive gecko into ceiling. Tarana da Alamana da A Press the positive and negative ground wires, and then connect the power cord. Use the plugs to connect the lamp wires to the output port of the drive power supply. Use the self-tapping screws to lock the hanging plate on the gecko. Use the nuts to fix the bent tube lamp body on the ceiling plate. Use screws to fix the ceiling plate on the hanging plate. Insert into the ceiling tray. Set into washer spacer. Insert the rod at one end of the lamp body into the corresponding hole of the ceiling plate. Secure the glass ball with the end cap Side lock hexagon socket screws to fix the parts. Tighten the Allen screws with a small wrench.

Insert the glass ball on the position of the lamp body with the light source

SPECIFICATIONS

- Material: Aluminum Silicon Opal Glass
- Lamp type: LED, 42W, 3000K, 3289Lm, CRi 80
- Ingress Protection: IP20. Protection against entry of solid objects greater than 12mm in diameter.

WARNING

- Make sure that the products is installed properly before connecting to electricity.
- Do not cover the fitting.

INSTALLATION INSTRUCTIONS





Electrical products can cause death, injury, or damage to property. Maintenance and installation should only be carried out by a professional electrician.



The light source contained in this luminarie shall only be replaced by the manufacturer or his service agent or a similar qualified person.

• Ensure main supply is switched off.





Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

















